

In Proud Partnership with Sensor Instruments

PAQUIN
SENSORS


For technical support, sales, & distribution
within the USA & Canada

www.paquin.com | (800) 831-8217 | paquinsensors@paquin.com

L-LAS Series

▶ L-LAS-TB-75-T-AL L-LAS-TB-75-R-AL

- Line laser <0.39 mW, wave length 670 nm, laser class 1
- Visible laser line, light curtain 75 mm
- Measuring range typ. 73 mm
- Resolution up to 8 µm (depends on selected scan frequency)
- Working distance up to 2000 mm
- Integrated interference filter
- CCD line detector with 1180 pixel, 9440 subpixel
- RS232 user interface (USB or Ethernet converter optional)
- 2 digital inputs, 3 digital outputs (HIGH/LOW/GO)
- Analog output adjustable via software (0 ... +10V or 4 ... 20mA)
- Max. scan frequency selectable via software (1.5 kHz or 2.5 kHz)
- Multi-edge evaluation of the video signal
- Switching state indication via 4 two-color LEDs (2x red/grn, 2x yel/grn)

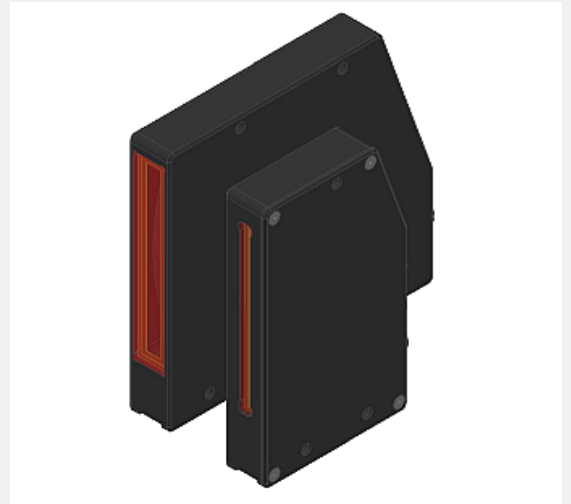


Design

Product name:

L-LAS-TB-75-T-AL (Transmitter)
L-LAS-TB-75-R-AL (Receiver)
(Receiver incl. Windows® PC software
L-LAS-TB-Scope as of V5.0)

Accessories: (cf. pages 8-9)

TRA-L-LAS-TB-CL-... (mounting plate)
ABL-TB-75-CL (blast air top-part)

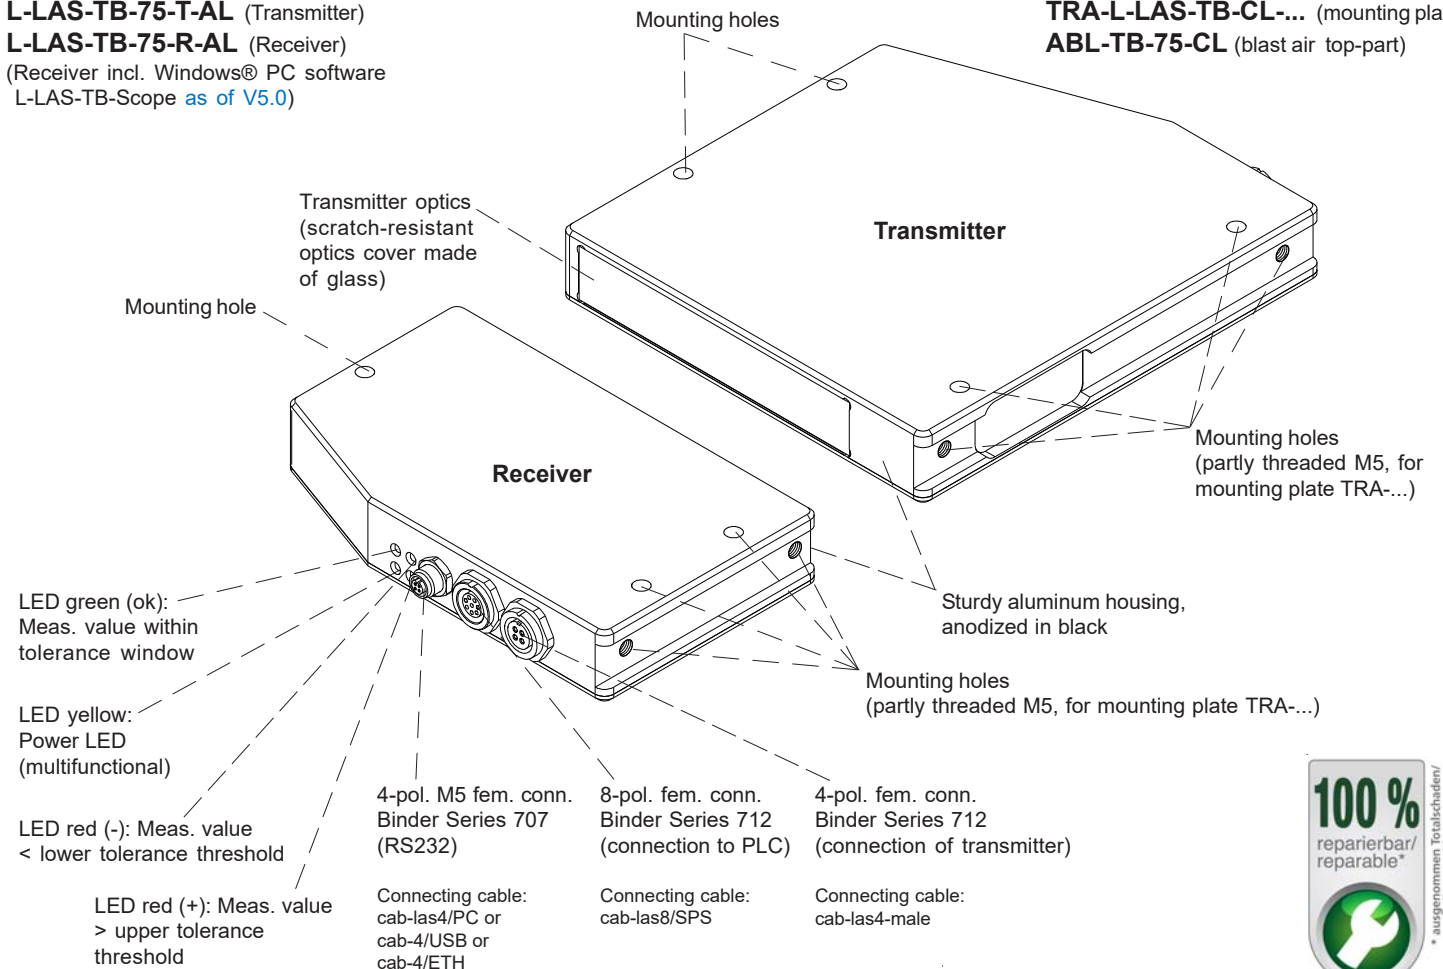




Technical Data

| Type | L-LAS-TB-75-T-AL L-LAS-TB-75-R-AL |
|--|---|
| Laser | Semiconductor laser, 670 nm, DC operation, < 0.39 mW max. opt. power, laser class 1 acc. to DIN EN 60825-1. The use of these laser sensors therefore requires no additional protective measures. |
| Working distance | distance transmitter/receiver: up to 2000 mm |
| Measuring range | typ. 73 mm |
| Resolution | typ. 8 µm (Normal Speed mode), typ. 16 µm (Fast Speed mode) |
| Reproducibility | typ. ± 8 µm (Normal Speed mode), typ. ± 16 µm (Fast Speed mode) |
| Linearity | typ. 0.15% FSR (full scale range) |
| Optical filter | Interference filter |
| Analog output (1x) | voltage output 0 ... +10V or current output 4 ... 20mA (adjustable under Windows® via PC) |
| Digital outputs (3x) (OUT0, OUT1, OUT2) | OUT0: (-) Measuring value < lower tolerance threshold OUT1: (+) Measuring value > upper tolerance threshold OUT2: (ok) Measuring value within tolerance window pnp bright-switching/npn dark-switching or pnp dark-switching/npn bright-switching, adjustable under Windows®, 100 mA, short-circuit proof |
| Digital inputs (2x) (IN0, IN1) | IN0: Extern trigger, IN1: Teach/Reset (double function) input voltage +Ub/0V, with protective circuit |
| Voltage supply | +24VDC (± 10%) |
| Sensitivity setting | under Windows® via PC |
| Laser power correction | adjustable under Windows® via PC |
| Current consumption | typ. 200 mA |
| Enclosure rating | electronics: IP54, optics: IP67 |
| Operating temperature range | -10°C ... +50°C |
| Storage temperature range | -20°C ... +85°C |
| Housing material | aluminum, anodized in black |
| Housing dimensions | transmitter: LxWxH approx. 130 mm x 118 mm x 20 mm (without flange connectors) receiver: LxWxH approx. 70 mm x 118 mm x 20 mm (without flange connectors) |
| Connectors receiver | 8-pole circular female connector type Binder 712 (PLC/Power) 4-pole M5 circular female connector type Binder 707 (RS232/PC) 4-pole circular female connector type Binder 712 (connection to transmitter) |
| Connector transmitter | 4-pole circular female connector type Binder 712 (connection to receiver) |
| LED display | LED red (+): measuring value > upper tolerance threshold LED green (ok): measuring value within tolerance window LED red (-): measuring value < lower tolerance threshold LED yellow: multifunctional |
| EMC test acc. to | DIN EN 60947-5-2 |
| Scan frequency | Normal Speed mode (high resolution = 8 µm): max. 1.5 kHz Fast Speed mode (half resolution = 16 µm): max. 2.5 kHz can be switched under Windows® |
| Max. switching current | 100 mA, short-circuit proof |
| Interface | RS232, parameterisable under Windows® |
| Connecting cables | Connection to PC: cab-las4/PC or cab-4/USB or cab-4/ETH Connection to PLC: cab-las8/SPS or cab-las8/SPS-w Connecting cable transmitter/receiver: cab-las4-male |
| Output polarity | bright/dark switching, can be switched under Windows® |

Dimensions


L-LAS-TB-75-T-AL
(Transmitter)

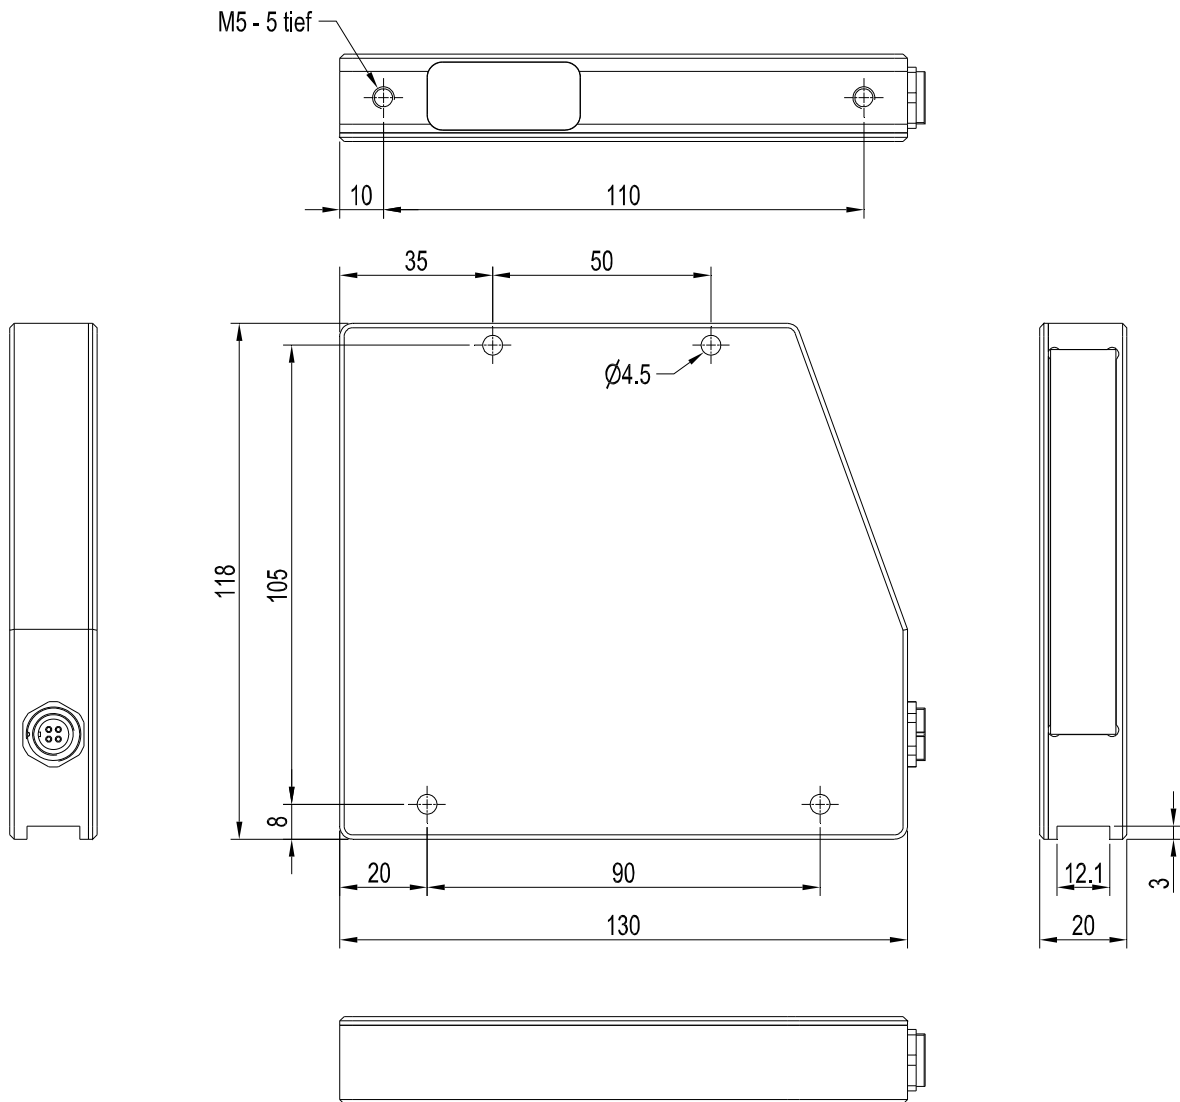

All dimensions in mm

Dimensions

L-LAS-TB-75-R-AL
(Receiver)

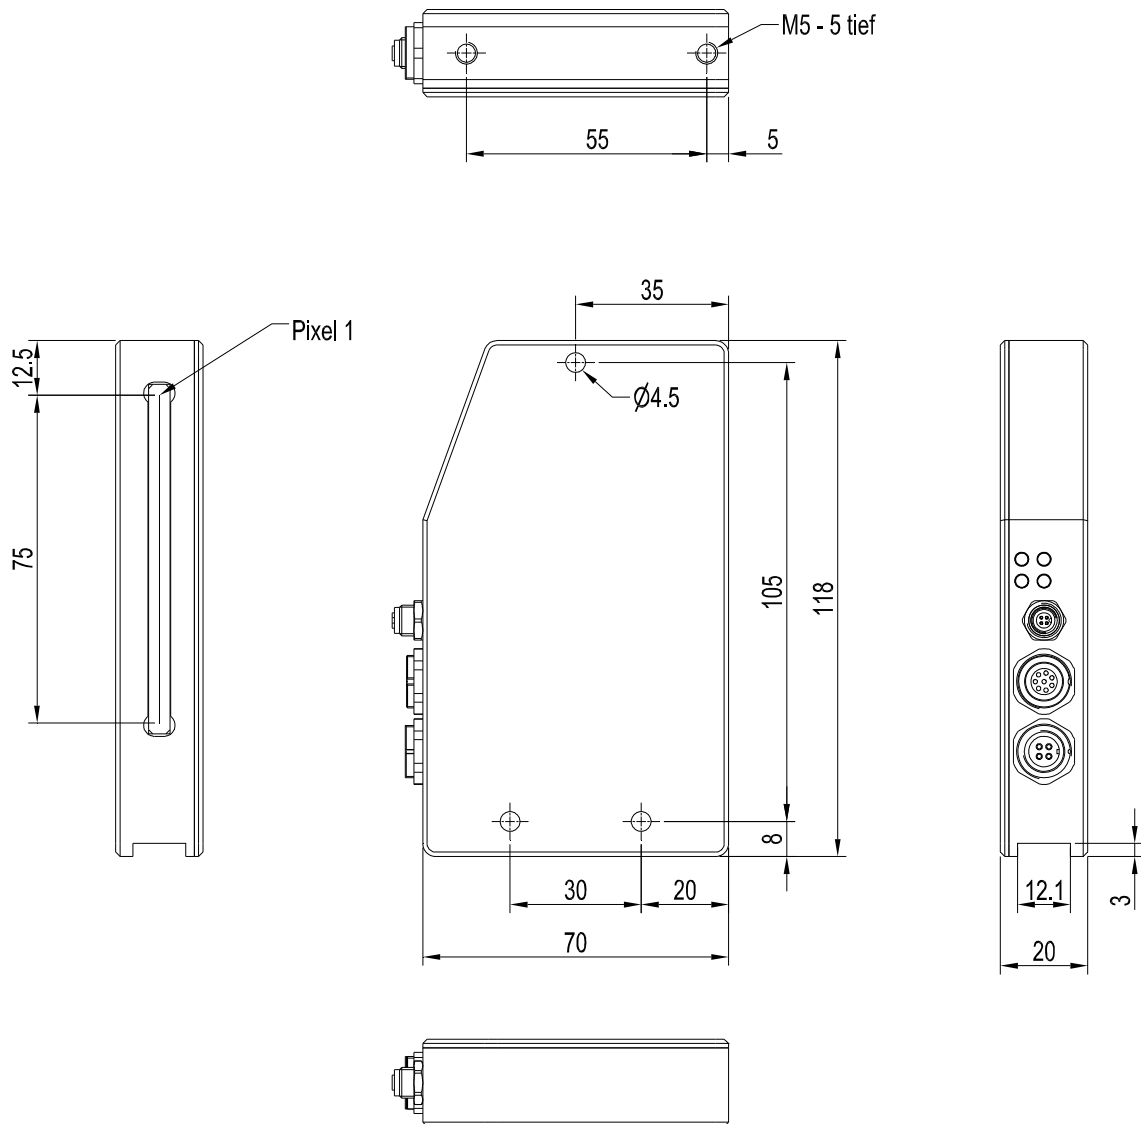

All dimensions in mm




Connector Assignment

**Connection L-LAS-TB-...-R-AL (Receiver) to PLC:
8-pole fem. connector Binder Series 712**

| Pin: | Color: | Assignment: |
|------|---------------|--|
| 1 | white | GND (0V) |
| 2 | brown | +24VDC (± 10%) |
| 3 | green | IN0 (EXT TRIGGER) |
| 4 | yellow | IN1 (TEACH/RESET) |
| 5 | grey | OUT0 (-) |
| 6 | pink or black | OUT1 (+) |
| 7 | blue | OUT2 (ok) |
| 8 | red | ANA (voltage 0...+10V or current 4...20mA) |

Connecting cable:
cab-las8/SPS-(length) or
cab-las8/SPS-w-(length) (angle type 90°)
(standard length 2m)

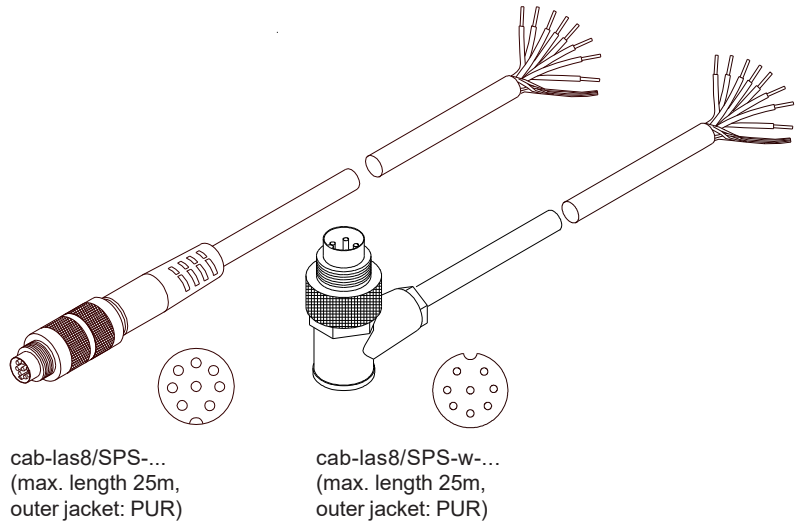

**Connection L-LAS-TB-...-R-AL (Receiver) to PC:
4-pole fem. connector Binder Series 707**

| Pin: | Assignment: |
|------|-------------------|
| 1 | +24VDC (+Ub, OUT) |
| 2 | GND (0V) |
| 3 | RxD |
| 4 | TxD |

Connection via RS232 interface at the PC:

Connecting cable:
cab-las4/PC-(length)
cab-las4/PC-w-(length) (angle type 90°)
(standard length 2m)

alternative:

Connection via USB interface at the PC:



USB converter (incl. driver software):
cab-4/USB-(length)
cab-4/USB-w-(length) (angle type 90°)
(standard length 2m)

alternative:

Connection to local network via Ethernet bus:

Ethernet converter (incl. software „SensorFinder“):
cab-4/ETH-500
(standard length 0.5m)

Optional: External CAT5 cable, e.g.
cab-eth/M12D-RJ45-flx-(length)

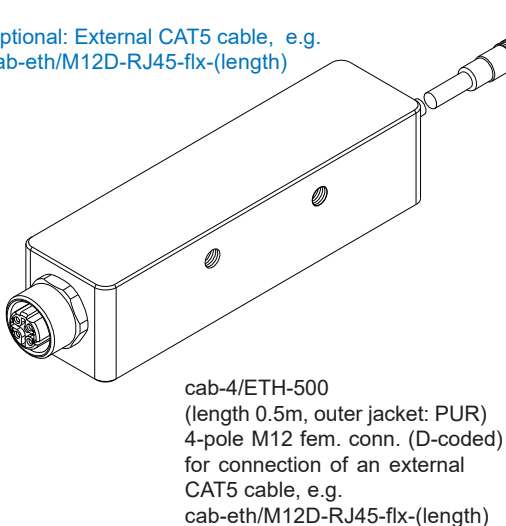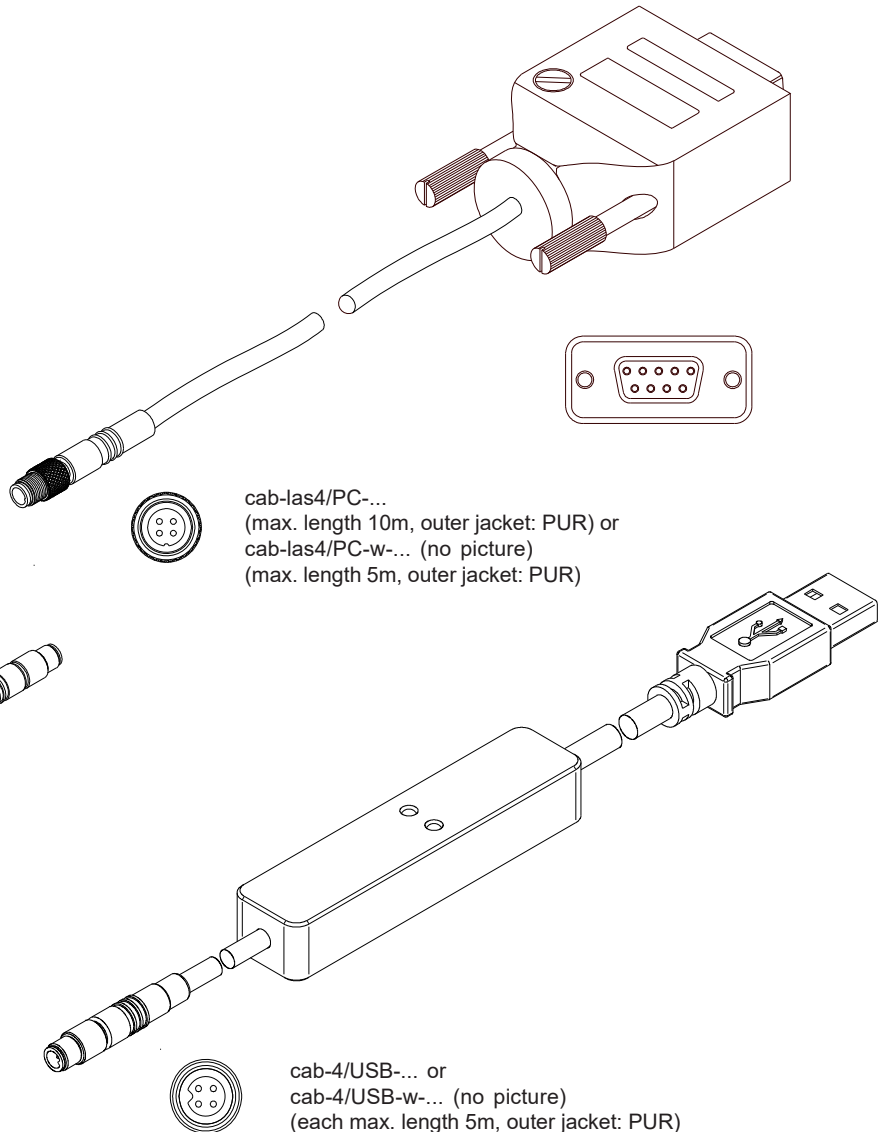


Connector Assignment

Connection L-LAS-TB-...-T-AL (Transmitter)
with L-LAS-TB-...-R-AL (Receiver)
4-pole female connector Binder Series 712

Pin: Assignment:

- 1 +5VDC
- 2 0V (GND)
- 3 I-CONTROL (0V ... +5V)
- 4 not connected

Connecting cable:
cab-las4-male-(length)
cab-las4-male-w-(length) (angle type 90°)
(standard length 2m)

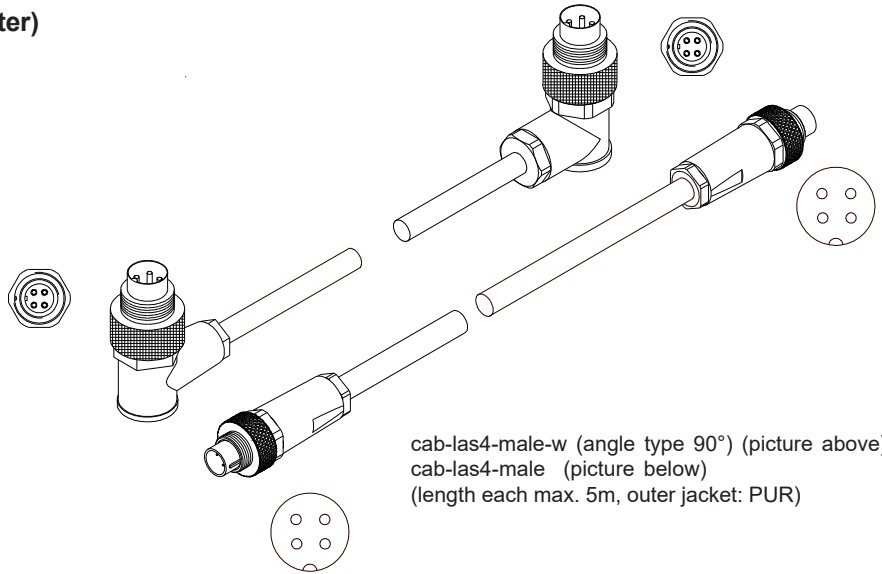

cab-las4-male-w (angle type 90°) (picture above) or
cab-las4-male (picture below)
(length each max. 5m, outer jacket: PUR)

LED Display

L-LAS-TB-75-R-AL
(Receiver)

LED display:


- (+) ● Power
- (-) ● (ok)

LED red (+): ●
Measuring value
> upper tolerance threshold
(OUT1)

LED red (-): ●
Measuring value
< lower tolerance threshold
(OUT0)

LED green (ok): ●
Measuring value within
tolerance window
(OUT2)

LED yellow: ●
Power LED
(multifunctional)

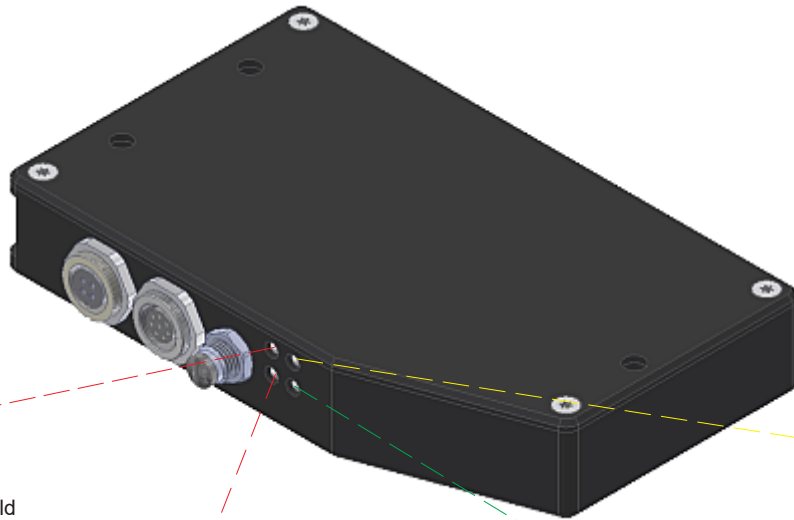

Laser Information

The laser transmitters of L-LAS-TB series comply with laser class 1 according to EN 60825-1. Under reasonably foreseeable conditions a class 1 laser is safe. The reasonably foreseeable conditions are kept during specified normal operation. The use of these laser transmitters therefore requires no additional protective measures.

The laser transmitters of L-LAS-TB series series are supplied with an information label „CLASS 1 Laser Product“.




Class 1 Laser Product
IEC 60825-1: 2014
P<0.39 mW; λ=670 nm
COMPLIES WITH 21 CFR 1040.10 AND 1040.11
EXCEPT FOR CONFORMANCE WITH IEC 60825-1
ED. 3, AS DESCRIBED IN
LASER NOTICE NO. 56, DATED MAY 8, 2019.



Parameterization
Windows® user interface:

(The current software version is available for download on our website.)

The L-LAS-TB-...-AL sensor can be easily parameterised with the Windows® user interface L-LAS-TB-Scope (as of V5.0). For this purpose the sensor is connected to the PC with the serial interface cable cab-las4/PC (or cab-4/USB or cab-4/ETH). When parameterisation is finished, the PC can be disconnected again.

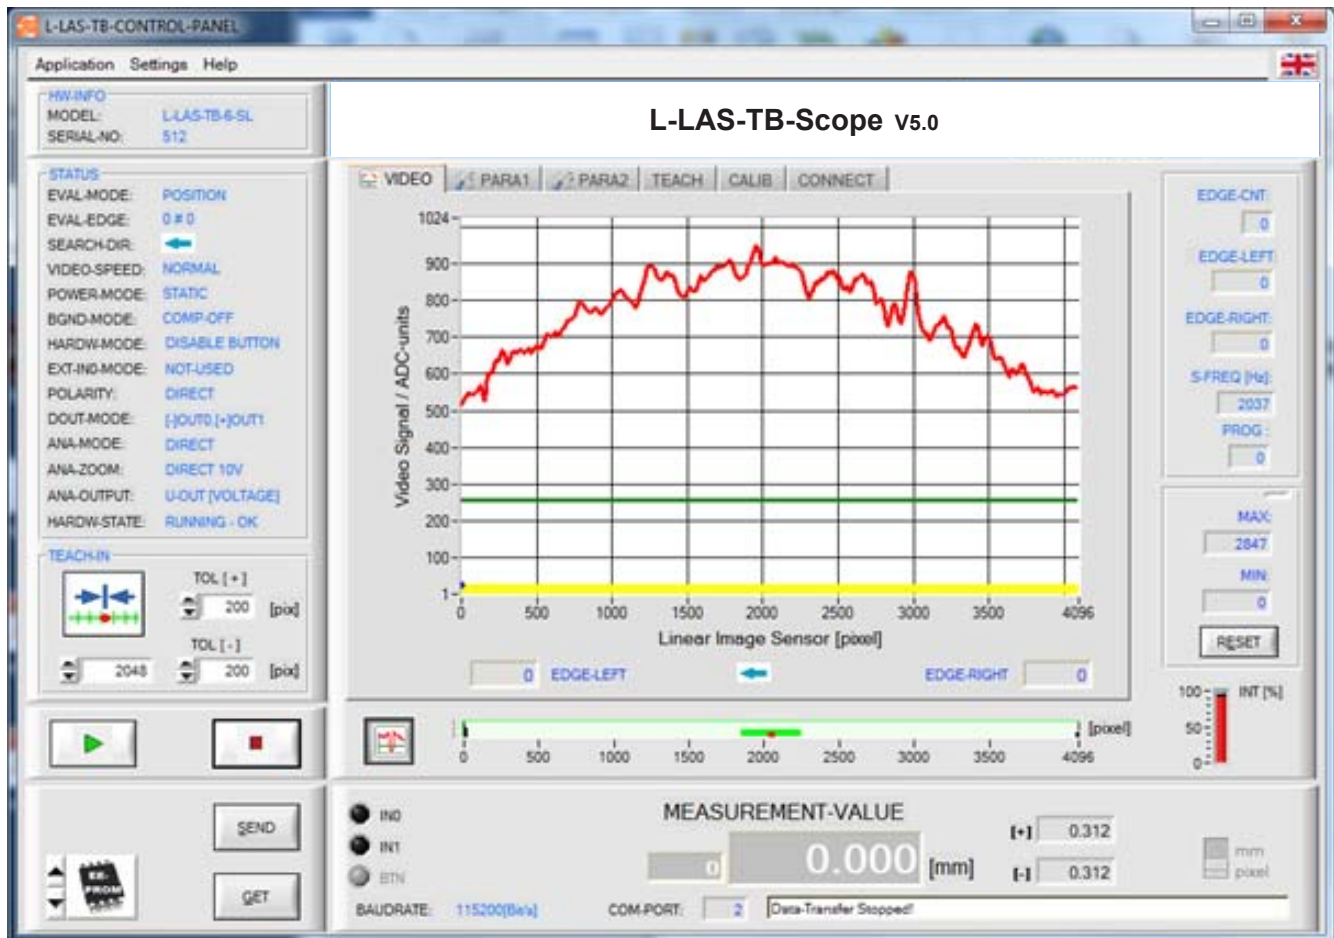Windows® user interface:

With the help of the L-LAS-TB-Scope software the following settings can be made at the sensor:

- Setting of laser power and type of automatic power correction
- Polarity of digital outputs
- Different evaluation modes
- Start of the teach process by software button
- Setting of tolerance ranges for monitoring the measured value
- Selection of scan frequency

Furthermore, various numerical and graphical measured quantities can be visualized with the L-LAS-TB-Scope software. For example, the raw data of the CCD line sensor can be displayed graphically and numerically.




Accessories
Mounting plate for L-LAS-TB-75-T-AL (Transmitter) and L-LAS-TB-75-R-AL (Receiver):

(please order separately)

TRA-L-LAS-TB-CL-L400 (total length 400 mm, max. transmitter/receiver distance cf. chart below)**TRA-L-LAS-TB-CL-L600** (total length 600 mm, max. transmitter/receiver distance cf. chart below)**TRA-L-LAS-TB-CL-L800** (total length 800 mm, max. transmitter/receiver distance cf. chart below)

(Aluminium housing, anodized in black)

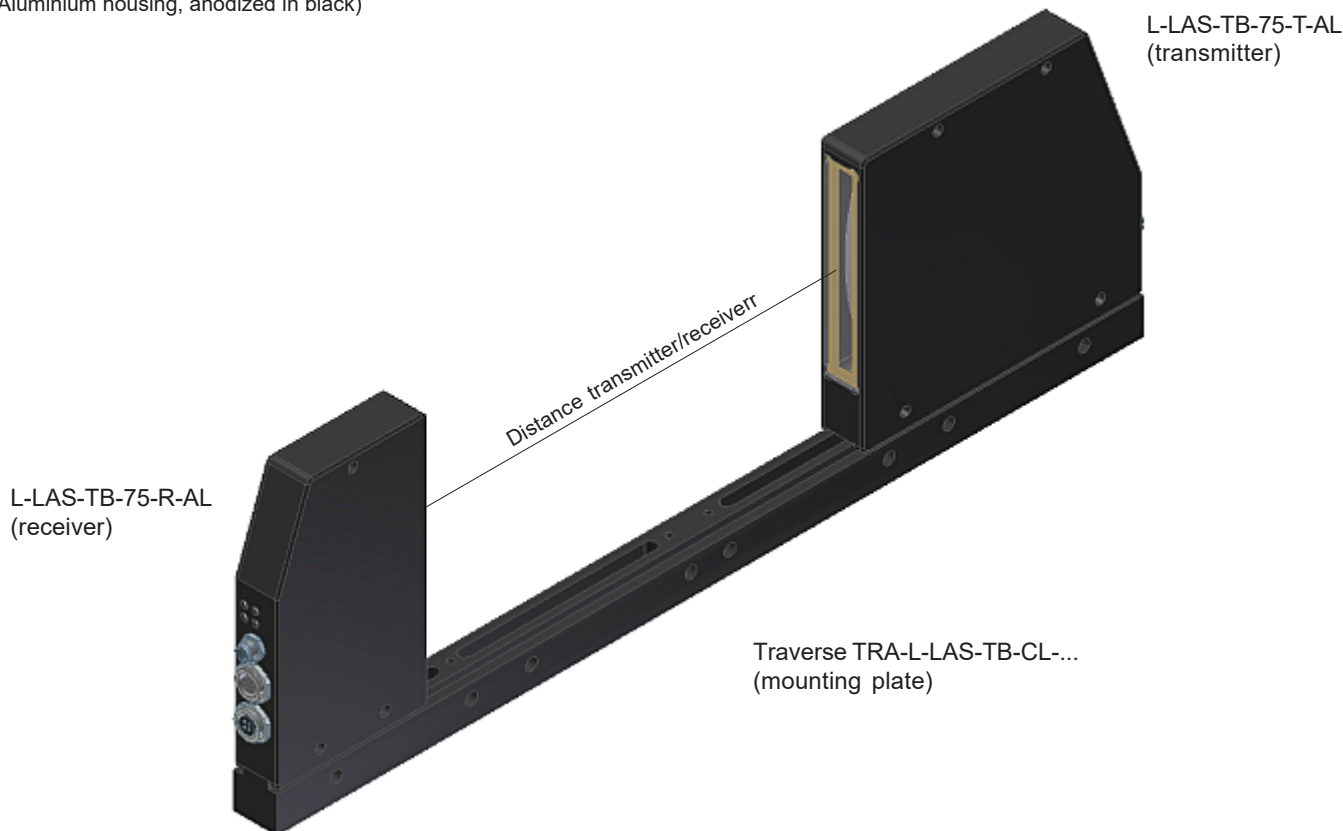

| Max. distance T/R in case of use of mounting plate: | TRA-L-LAS-TB-CL- L200 | TRA-L-LAS-TB-CL- L400 | TRA-L-LAS-TB-CL- L600 | TRA-L-LAS-TB-CL- L800 |
|---|-----------------------------|------------------------------|------------------------------|------------------------------|
| L-LAS-TB-6-T-AL L-LAS-TB-6-R-AL | max. distance T/R: 95 mm | max. distance T/R: 295 mm | max. distance T/R: 495 mm | max. distance T/R: 695 mm |
| L-LAS-TB-(16)-T-AL L-LAS-TB-(16)-R-AL | max. distance T/R: 60 mm | max. distance T/R: 260 mm | max. distance T/R: 460 mm | max. distance T/R: 660 mm |
| L-LAS-TB-28-T-AL L-LAS-TB-28-R-AL | ---- | max. distance T/R: 222 mm | max. distance T/R: 422 mm | max. distance T/R: 622 mm |
| L-LAS-TB-50-T-AL L-LAS-TB-50-R-AL | ---- | max. distance T/R: 205 mm | max. distance T/R: 405 mm | max. distance T/R: 605 mm |
| L-LAS-TB-75-T-AL L-LAS-TB-75-R-AL | ---- | max. distance T/R: 200 mm | max. distance T/R: 400 mm | max. distance T/R: 600 mm |
| L-LAS-TB-100-T-AL L-LAS-TB-100-R-AL | ---- | max. distance T/R: 160 mm | max. distance T/R: 360 mm | max. distance T/R: 560 mm |

Accessories

Blast air top part:



ABL-TB-75-CL

(Plastic housing, black, please order separately for each transmitter and receiver)

suitable for:

L-LAS-TB-75-T-AL (Transmitter) and

L-LAS-TB-75-R-AL (Receiver)

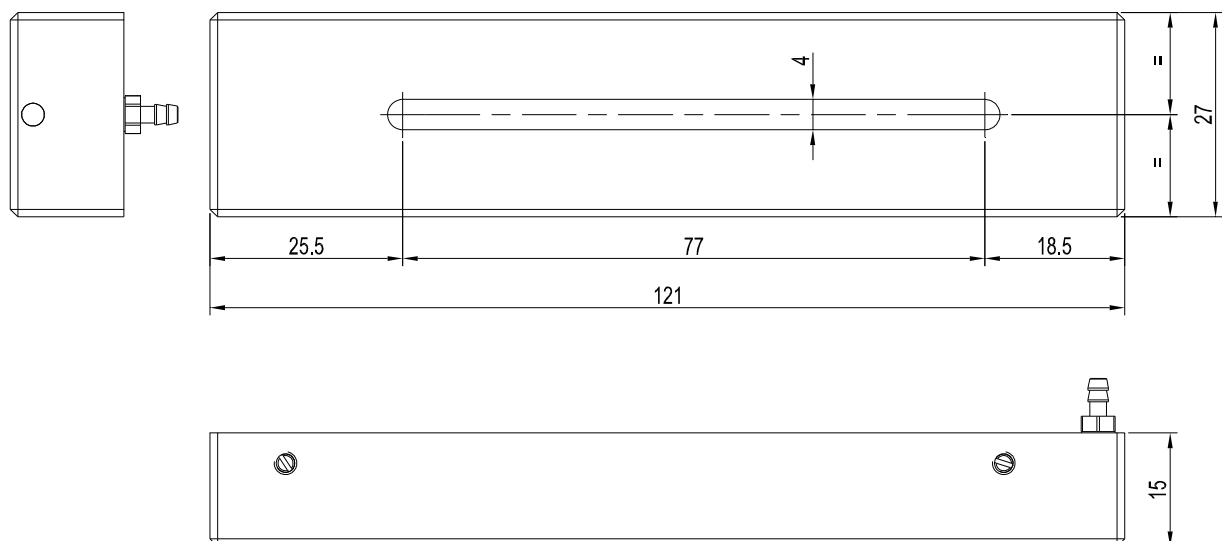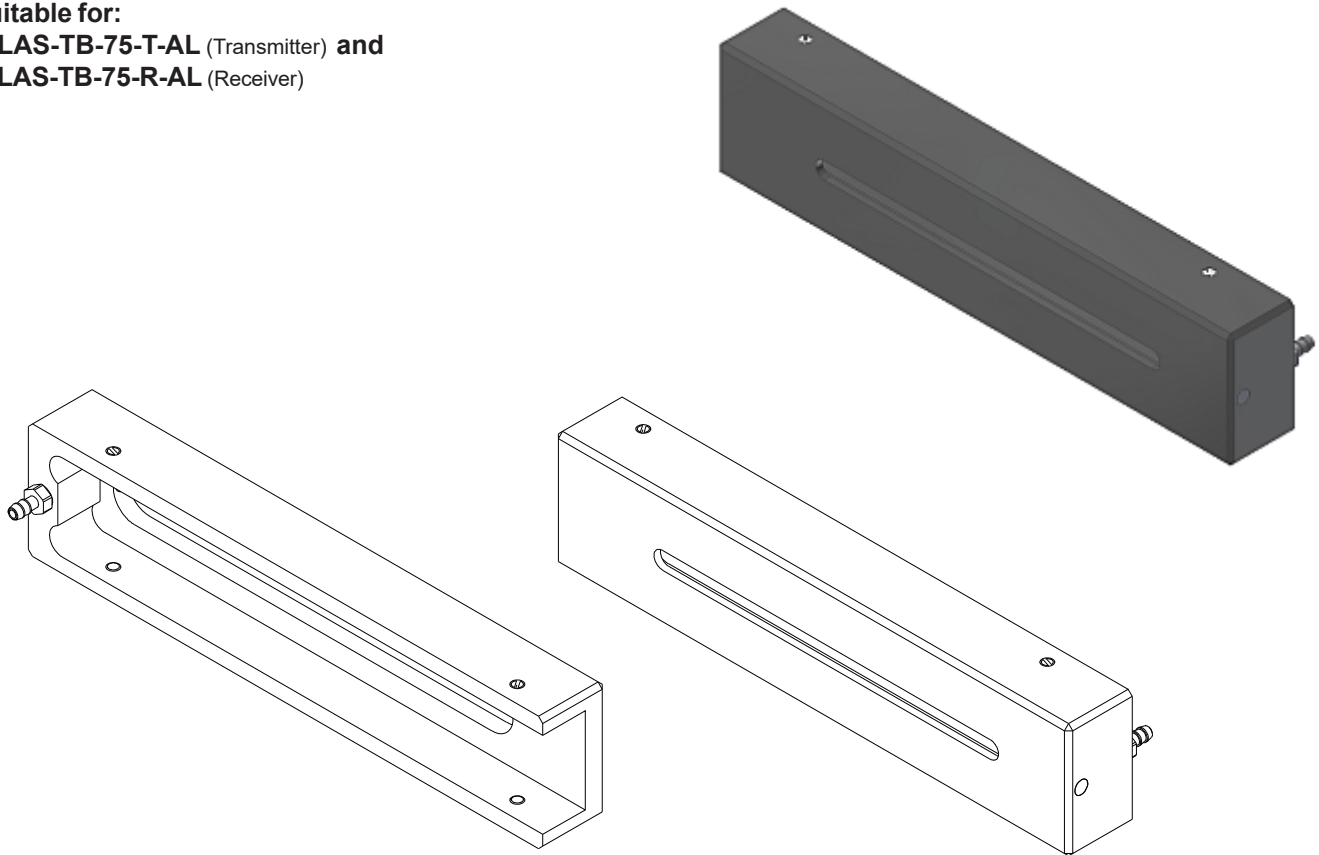

All dimensions in mm