

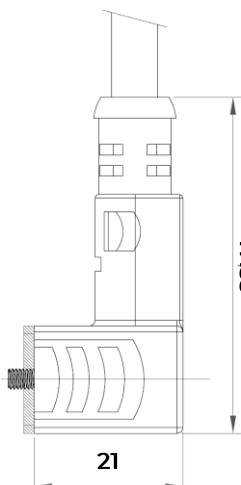


DIN 43650-C with Shielded Overmolded PUR Cable



Technical Parameters

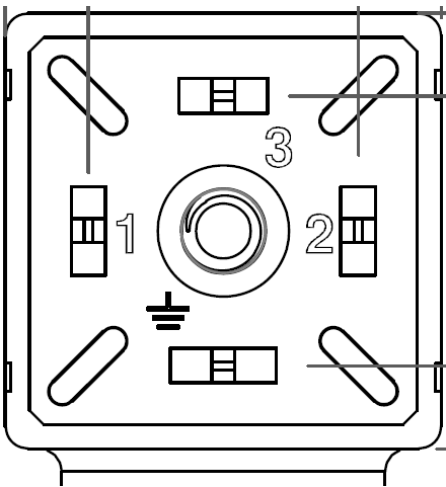

Material	Polyurethane (Shielded)	
Connector Color	Black	
Contacts Spacing	9.4mm	
Number of Contacts	4	
Earth Positioning	H.6	
Central Fixing Screw	M3 x 0.5 L = 22.5mm	
Gasket	Material	NBR
	Type	Integrated
IP Rating	IP65	
Rated Voltage	250 VAC / 300 VDC	
Number of Conductors	3 poles + Earth	
Conductors Size	20 AWG / 0.5mm ²	
Cable Length	See Ordering Chart	
Cable Jacket	Stripped back 35mm	
Conductor Ends	Stripped back 5mm and tinned	
Pinout	1: Brown 2: Blue 3: Black ⊥ Yellow/Green	



Shield

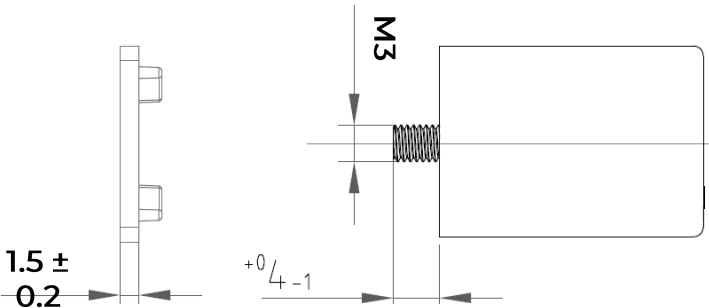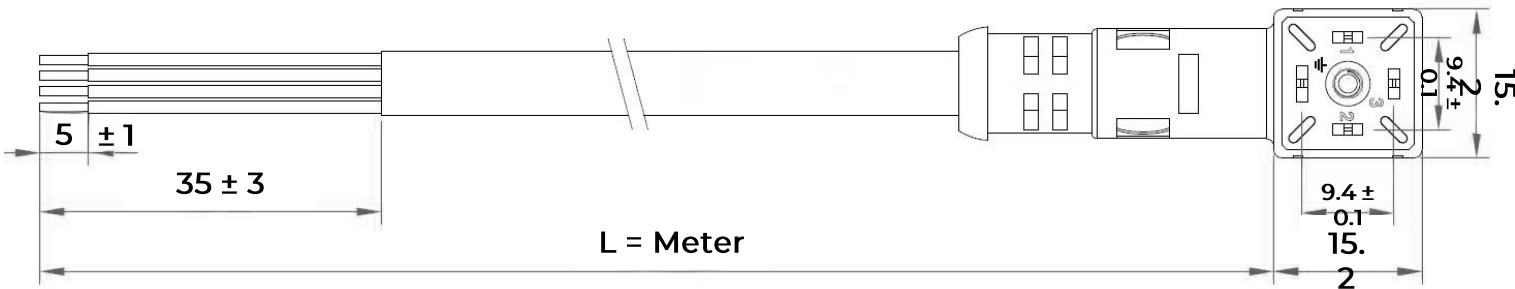

Cable Length (L)	Paquin Part #
1 Meter	PSE115
3 Meter	PSE116
5 Meter	PSE117
7.5 Meter	PSE118
10 Meter	PSE119
20 Meter	PSE120