


M12x1, 5 pole with Shielded Overmolded PUR Cable

Technical Parameters



Material	Polyurethane (Shielded)
Coding	Type A
Number of Contacts	5 poles
IP Rating	IP67
Rated Voltage	60V
Rated Current	4A
Insulation Resistance	≥500 mΩ
Working Temperature	-13°F to 185°F (-25°C to 85°C)
Mechanical Plug-In Life	Min. 100x
Number of Conductors	5
Conductors Size	24 AWG / 0.25mm ²
Cable Length	See Ordering Chart
Cable Jacket	Stripped back 35mm
Conductor Ends	Stripped back 5mm and tinned
Pinout	1: Brown 2: White 3: Blue 4: Black 5: Grey

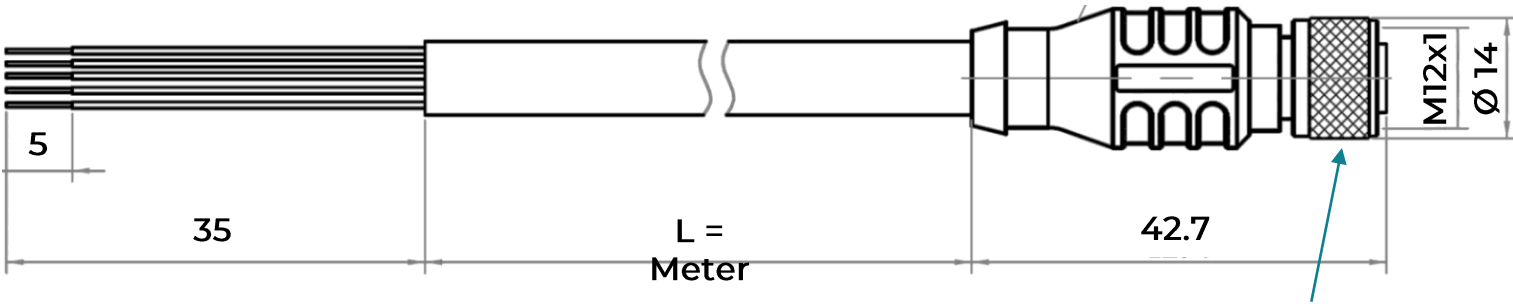

Knurled
Aluminum

M12x1, 5 Pole Shielded PUR Cable	
Cable Length (L)	Paquin Part #
1 Meter	PSE16
3 Meter	PSE17
5 Meter	PSE18
7.5 Meter	PSE20
10 Meter	PSE21
20 Meter	PSE22