

Flush Mount with High Temperature Options

- SS316L flush pressure port
- Up to 482°F media temperature
- Gauge, absolute & sealed gauge
- Numerous output signals
- Optional Ex protection
Exia II CT6



About

The P13 pressure transmitter is a flush mount design capable of withstanding system media temperatures up to 482°F while still performing within tolerances. Perfect for viscous media such as polyurethane, glue, paints, sludges of all types and more. Flush mount with no hollow pressure port; perfect for clean-in-place requirements.

Applications

- ✓ Viscous media
- ✓ Paints, sludges and slurries
- ✓ Sanitary
- ✓ CIP Clean-in-place
- ✓ Water and most other fluids

Build Your Part Number

Series P13

Example: P13G69A155E6B

| Series | |
|--------|--|
| P13 | |

| Pressure Reference - select one | |
|---------------------------------|--------------|
| G | Gauge |
| S | Sealed Gauge |
| A | Absolute |

| Media Temperature Range - select one | |
|--------------------------------------|---------------------------------------------------------|
| 6 | -40...185°F (no cooling fins) <i>see diagram page 3</i> |
| 7 | -40...302°F (3 cooling fins) <i>see diagram page 4</i> |
| 8 | -40...482°F (5 cooling fins) <i>see diagram page 4</i> |

| Safety Barrier - select one | |
|-----------------------------|------------------------------|
| 9 | Standard (no safety barrier) |
| 11 | Exia II CT6 |

| Output Signal - select one | | Supply & Pin-Out | | |
|----------------------------|-----------------|--------------------|---------------|---------------------------------|
| A | 4 ... 20 mA | 24 (12 ... 30) VDC | Pin 1: Supply | Pin 2: Output Signal |
| B | 0 ... 5 VDC | 24 (12 ... 24) VDC | Pin 1: Supply | Pin 2: GND Pin 3: Output Signal |
| C | 0 ... 10 VDC | 24 (12 ... 24) VDC | Pin 1: Supply | Pin 2: GND Pin 3: Output Signal |
| E | 1 ... 5 VDC | 24 (12 ... 24) VDC | Pin 1: Supply | Pin 2: GND Pin 3: Output Signal |
| H | 0.5 ... 4.5 VDC | 24 (12 ... 24) VDC | Pin 1: Supply | Pin 2: GND Pin 3: Output Signal |

| Pressure Range (psi) - select one | | Over Pressure (psi) | Burst Pressure (psi) |
|-----------------------------------|--------------------------------------------------------------------------------------|---------------------|----------------------|
| 15 | 0 ... 1.5 | 4.5 | 7.5 |
| 16 | 0 ... 2 | 6 | 10 |
| 17 | 0 ... 2.5 | 7.5 | 12.5 |
| 18 | 0 ... 5 | 15 | 25 |
| 19 | 0 ... 10 | 30 | 50 |
| 21 | 0 ... 15 | 30 | 45 |
| 22 | 0 ... 20 | 40 | 60 |
| 23 | 0 ... 25 | 50 | 75 |
| 24 | 0 ... 30 | 60 | 90 |
| 25 | 0 ... 50 | 100 | 150 |
| 26 | 0 ... 100 | 200 | 300 |
| 27 | 0 ... 150 | 300 | 450 |
| 28 | 0 ... 200 | 400 | 600 |
| 29 | 0 ... 250 | 500 | 750 |
| 31 | 0 ... 300 | 600 | 900 |
| 32 | 0 ... 400 | 600 | 1200 |
| 33 | 0 ... 500 | 750 | 1500 |
| 34 | 0 ... 1000 | 1500 | 3000 |
| 35 | 0 ... 1500 | 2250 | 4500 |
| XX | Use "XX" for custom ranges (Ex: 0 ... 550 psi) Please inform range below part number | | |

| Process Connection - select one; see diagrams page 3 | |
|------------------------------------------------------|---------------|
| 5E | 1/2" NPT male |
| 5Q | G1/2" male |


| Electrical Connection - select one; see diagrams page 3 for dimensions & pin-out | |
|----------------------------------------------------------------------------------|--------------------------------------------------------|
| 6B | DIN 43650-A (field wireable mating connector included) |

Technical Parameters



| Technical Parameters | | |
|----------------------|-----------------------------------|----------------------------------------------------------------------------------------|
| Accuracy | At 77°F (+/-9°F) | ± 0.5% FS typical |
| | Hysteresis at 77°F | ± 0.1% FS typical |
| | Repeatability | ± 0.1% FS typical |
| | Response time | ≤ 1ms (up to 90% FS) |
| | Temperature drift | ± 1.5% FS typical (-4...185°F) |
| Environmental | Media temperature | -40 ...+185°F (without cooling fins) |
| | Ambient temperature | -4 ...+185°F (without cooling fins) |
| | Storage temperature | -40 ...+185°F (without cooling fins) |
| | Protection | IP65 |
| | Vibration | Sine curve: 20g, 25Hz-2kHz, IEC 60068-2-6 Random: 7.5 grms, 5Hz-1kHz; IEC 60008-2-6 |
| | Insulation resistance | 100M Ω / 250VDC |
| | Ex (optional) | Exia II CT6 |
| EMC | Immunity | IEC 61000-6-2 |
| | Radiation | IEC 61000-6-3 |
| Mechanical | Wetted parts (sensor) | 316L |
| | Wetted parts (process connection) | 316L |
| | Housing | 316L |

Media Temperature Ranges & Process Connection Dimensions

Option 6
no cooling fins
-40...185°F

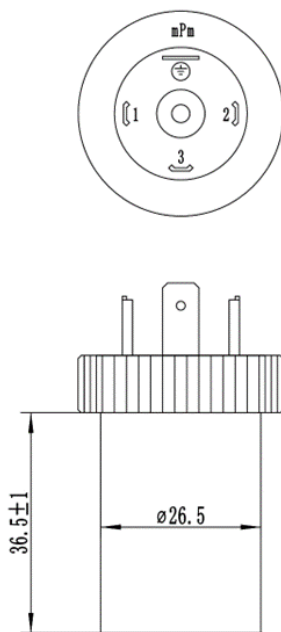


DIN 43650-A

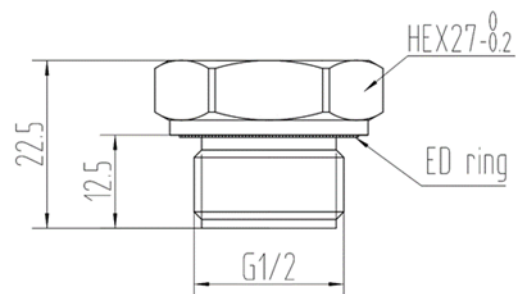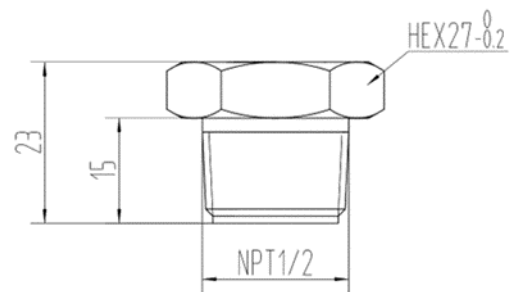

Media Temperature Ranges & Process Connection Dimensions (con't)


Option 7

3 cooling fins
-40...302°F

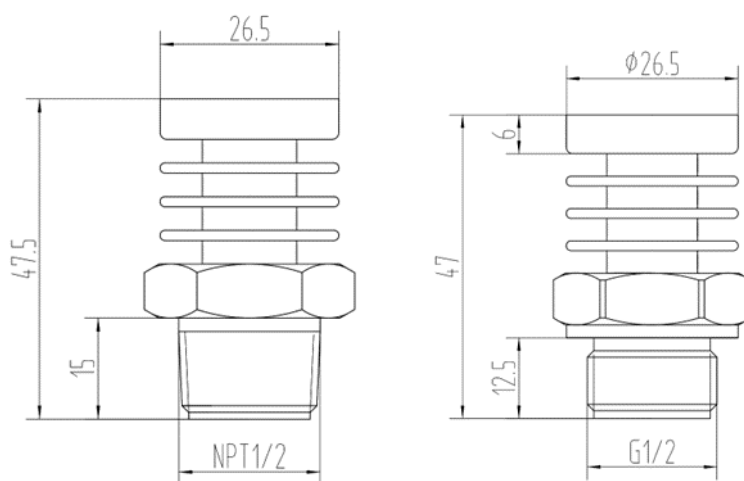

Option 8

5 cooling fins
-40...482°F

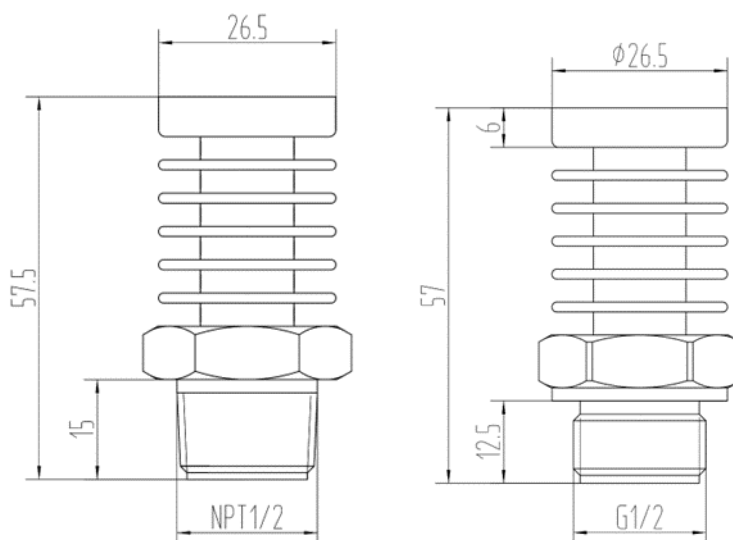

PAQUIN SENSORS

Paquin Sensors' product portfolio is designed to provide options to fit the most diverse range of specifications.

We collaborate with our customers to match the best product technologies with your unique application requirements.

Please [contact us](#) or call +1 (800) 831-8217 anytime to discuss your needs!