
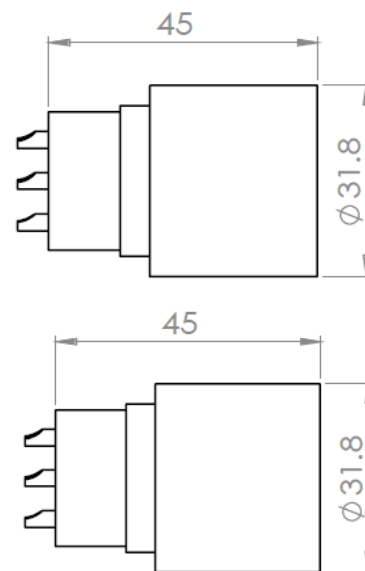



# Circular Attachable Wet-Mate Underwater Connector

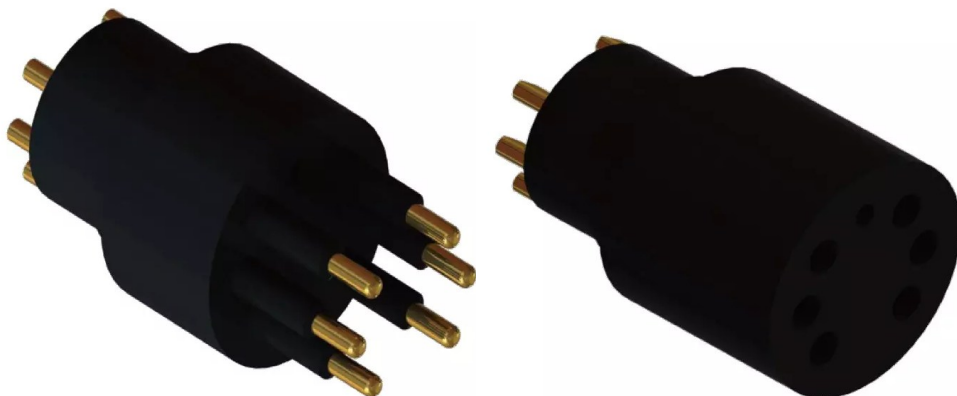

Operation Specification	
Max. voltage	600 V DC
Current rating @contact	10A
Max. current @connector	50A
Insulation resistance	>200 Mohm
Contact resistance	<0.01 ohm
Depth rating	600 bar
Temperature rating	-40 to 60 °C

Material Specification	
Connector body	Chloroprene rubber
Contact	Gold plated brass
Socket	Gold plated beryllium copper
Location pin	Contact 6: Stainless steel 316
	Contact 8: N/A

### Face View (Male)

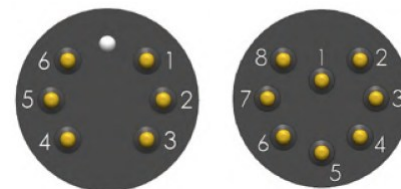

Note: Cabling, contacts, and connector configuration can be customized per customer specification

## Build Your Part Number

**Example: PSE231M8C1200**

**Series**  
PSE231

**Type - select one**  
**M** Male  
**F** Female

**Contacts - select one**  
**6C** 6 Contacts  
**8C** 8 Contacts

**Cable Length – specify in feet**  
**XX** Cable length in feet (ex. 1200 feet = 1200)