

# Pressure

## Explosion Proof Diaphragm Switch

**D1X, D2X Series**

### Features

- ▶ Hermetically sealed
- ▶ Explosion proof housing for hazardous location
- ▶ Tamper proof setpoint adjustment
- ▶ Ideal for pressure or vacuum
- ▶ UL, CSA, ATEX approved
- ▶ NEMA 4, 7, 9 & IP66

### Applications

- ▶ Pump & compressor monitoring
- ▶ Hydraulic power units
- ▶ Oil & gas
- ▶ Food & beverage
- ▶ Utility & power generation
- ▶ Mining

### General Specifications\*

<b>Accuracy:</b>	± 0.5% of the adjustable range
<b>Switch:</b> Type: Rating:	Single pole double throw (SPDT) Snap Action; single circuit  10 amps @ 125/250 VAC; 3 amps @ 480 VAC (Class A or H limit switch). Consult sales drawing for ratings of optional limit switches.
<b>Wetted Parts:</b> Process Fitting: Diaphragm: Enclosure:	303 stainless steel 17-7 PH stainless steel Die-cast aluminum, anodized and painted
<b>Electrical Connection:</b>	Screw terminals on covered terminal strip via 1/2" NPT (D1X) and 3/4" NPT (D2X) conduit connection.
<b>Enclosure Ratings:</b>	NEMA 4, 7, 9
<b>Pressure Connection:</b>	1/4" NPT Female
<b>Approvals:</b> UL (standard):	All models are UL approved for use in hazardous locations Class I, Groups B, C, & D; Class II, Groups E, F, & G. UL File No. E37043

\* See product configurator for additional options.


### Wiring Code

Lead	Circuit #1		Circuit #2	
	Pressure	Vacuum	Pressure	Vacuum
Normally Closed	Blue	Red	Orange	Yellow
Common	Purple	Purple	Brown	Brown
Normally Open	Red	Blue	Yellow	Orange



<b>Approvals (cont.):</b> CSA (standard):  ATEX (optional):	All models are CSA approved for use in hazardous locations Class I, Groups B, C & D; Class II, Groups E, F, & G. CSA File No. LR22354  EX models are ATEX marked as follows: <b>CE</b> 0081, ISSeP 08 ATEX024X II 2G D, Ex d IIC T6 Ex tD A21 IP66 T80°C -40°C ≤ Tamb ≤ +75°C
<b>Temperature Range:</b> Operating:  Storage:	-40° to +165°F (-40° to +74°C)  -65° to +200°F (-54° to 93°C)
<b>Adjustment Instructions:</b> Pressure:  Vacuum:	Turn adjustment screw counterclockwise to raise actuation point.  Turn adjustment screw clockwise to increase setpoint (higher vacuum).
<b>Options:</b>	Factory pre-set
<b>Shipping Weight:</b>	Single - approximate 5.0 lbs. Double - approximate 5.5


### Wiring Diagram

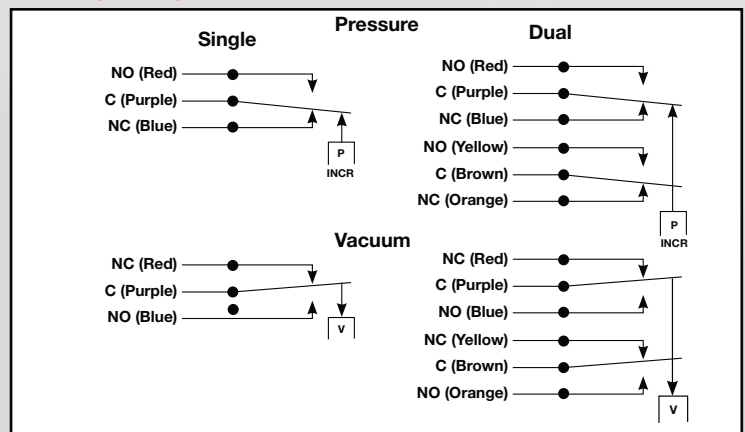

# Explosion Proof Diaphragm Switch

## D1X, D2X Series

### Technical Drawing

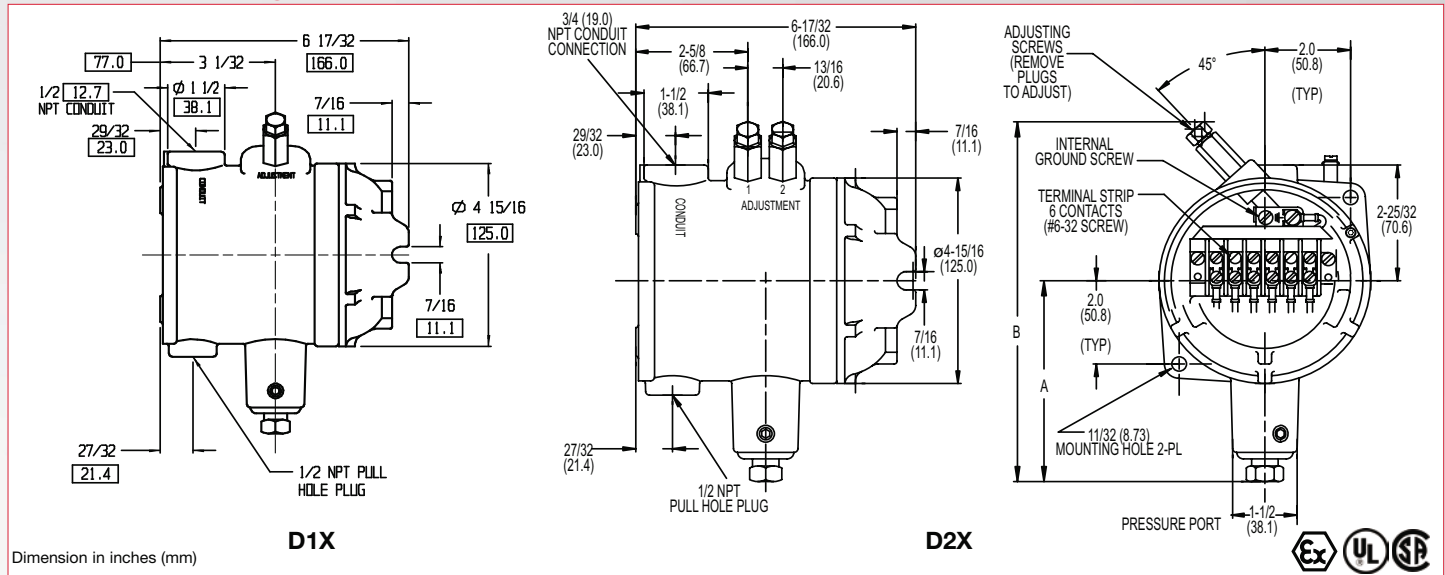

### Product Configurator

Example	D1X	-A	3SS	-P2	-UL
---------	-----	----	-----	-----	-----

**H** Hermetically sealed limit switch option - Class I, Division II (requires AA, CC or HH limit switch)

\* Highlighted options represent those most frequently used. Select these common options for improved availability. (5/21)

#### Base Configuration

- D1X** Single setpoint housed version
- D2X** Dual setpoint housed version

#### Limit Switch<sup>1</sup>

<b>-A</b>	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 3SS, 80SS or 150SS)
<b>-H</b>	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 18SS)
<b>X</b>	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (comes with an elastomer boot)
<b>-M</b>	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; 0.5 amps @ 125 VDC; 0.25 amps @ 250 VDC
<b>-GH</b>	1 amp @ 125 VAC; 1 amp @ 24 VDC with Gold Contacts
<b>X</b>	Hermetically sealed; 4 amps @ 125/250 VAC (not available on vacuum models)
<b>X</b>	Hermetically sealed; 10 amps @ 125/250 VAC (not available on vacuum models)
<b>X</b>	Hermetically sealed; 5 amps @ 125/250 VAC (not available on vacuum models)

#### Options

- UL** UL & CSA Approval
- EX** ATEX Certified, -EX in place of UL for ATEX only
- Sxxx** Factory pre-set (consult factory)

#### Pressure Connection

- Blank** 1/4" NPT female pressure connection (standard)
- X** 1/2" NPT female pressure connection

#### Adjustable Pressure Range

	Adjustable Range (PRESSURE)				Approx. Deadband <sup>2</sup> (Actuation Value) psi-(bar)	Proof Pressure psi (bar)
	Decreasing - psi (bar)		Increasing - psi (bar)			
	Min	Max	Min	Max		
3SS	.03 (.00)	2.85 (.2)	.18 (.01)	3 (.2)	.07 - .15 (0 - .01)	10 (.7)
<b>18SS</b>	.4 (.03)	17.74 (1.2)	.66 (.04)	18 (1.2)	.12 - .26 (.01 - .02)	60 (4.1)
<b>80SS</b>	.5 (.03)	76.6 (5.2)	3.9 (.3)	80 (5.4)	1.6 - 3.4 (.1 - .2)	160 (10.9)
150SS	1.5 (.10)	144 (9.8)	7.5 (.5)	150 (10.2)	2.3 - 6.0 (.2 - .4)	300 (20.4)

	Adjustable Range (VACUUM)				Approx. Deadband <sup>2</sup> (Actuation Value) In. Hg	Proof Pressure In. Hg
	Decreasing - In. Hg		Increasing - In. Hg			
	Min	Max	Min	Max		
3SS	0.06	5.72	0.34	6	.14 - .28	6
18SS	0.8	29.2	1.6	30	.4 - .8	30

**X** = no longer available

#### NOTES:

<sup>1</sup> Consult Supplemental Guide for specific deadband values

<sup>2</sup> Deadband values indicated when used with the "standard" limit switch