




In Proud Partnership with Huba Control
PAQUIN
SENSORS

For technical support, sales, & distribution within the USA & Canada
www.paquin.com | (800) 831-8217 | paquinsensors@paquin.com

# Relative pressure switch Type 521



Switching points set in factory are available both N/C and N/O function. Various electrical and pressure connections are available to suit given applications.



## Pressure range

0 ... 2.5 - 600 bar

- + Compact, rugged construction
- + Welded without sealing parts
- + Saving time by quick cable mounting by the customer with swift connector
- + Large selection of connections available

#### Technical overview

Relative		0 2.5 – 600 bar		
Operating conditions				
1edium	Liquids, gases and refrig	gerants (incl. ammonia)		
	Medium	-40 +135 °C		
l'emperature	Ambient	-30 +85 °C		
	Storage	-50 +100 °C		
Colombia according al	≤ 6 bar	5×FS		
olerable overload	> 6 bar	3 x FS (max. 1500 bar)		
	≤ 6 bar	10 x FS		
Rupture pressure	> 6 bar	6 x FS (max. 2500 bar)		
Materials				
Pressure Connection	Stainless steel 1.4404 / A	Stainless steel 1.4404 / AISI 316L (inside thread Schrader 1.4305 / AISI 303 only)		
Diug accommodation	Bolyandamida F004 CE I	Palvas damida FOO/ CETTI OAV O		

Pressure Connection		Stainless steel 1.4404 / AISI 316L (inside thread Schrader 1.4305 / AISI 303 only)
Plug accommodation		Polyarylamide 50% GF UL 94 V-0
Makadala ta a a ka akadala maadta m	Pressure connection	Stainless steel 1.4404 / AISI 316L (inside thread Schrader 1.4305 / AISI 303 only)
Materials in contact with medium	Sensor	Stainless steel

Electrical overview		
Output		Semiconductor (open collector)
Switching contact	High-Side Switch (PNP)	N/C contact or N/O contact
Switch load		High-Side Switch (PNP) max. 200 mA
Power supply		7 33 VDC
Current consumption		< 4 mA
Insulation voltage		500 VDC

Dynamic response	
Response time	< 2 ms, 1 ms typ.
Load cycle	< 100 Hz

Adjustment of switching points (factory set)	
Upper switching point	8 100% fs
Lower switching point	5 97% fs
Hysteresis	≥ 3 % fs

Electrical connection	Protection standard	Protection class
Swift connector with or without cable 1.5 m	IP 67	III
Connector M12x1	IP 67	III

	<sup>7</sup> /₁ <sub>6</sub> - 20 UNF	without or with Schrader	
nside thread	G 1/4	with O-Ring seal FPM (-30 +135 °C)	
	√₂ -14 NPT	≤60 bar	
	M20x1.5	sealed at front and manometer (combi)	
	7/16 - 20 UNF	sealing cone 45°	
	1/4 -18 NPT		
utside thread	G 1/4	sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM (-30 +135 °C)	
Outside trifead	R 1/4	EN 10226	
	G 1/2	sealed at back and manometer (combi) with Profile seal ring in FPM (-30 +135 °C)	
	G ½	sealed at front	

Installatio	n arrangement	
Unrestricte	d d	

Tests / Admissions	
Electromagnetic compatibility	CE conformity acc. EN 61326-2-3 and 50121-3-2
Shock acc. IEC IEC 68-2-27	100 g, 11 ms half sine wave, all 6 directions, free fall from 1 m on concrete (6x)
Constant shock acc. IEC 68-2-29	40 g for 6 ms, 1000x all 3 directions
Vibration acc. IEC 68-2-6	20 g, 15 2000 Hz, 15 25 Hz with amplitude ± 15 mm, 1 Octave/min. all 3 directions, 50 constant load
UL	ANSI/UL 61010-1 acc. E325110
EAC	

UL	ANSI/UL 61010-1 acc. E325110
EAC	
Weight	
~ 90 g	

Packaging (Please state on order)	
Single packaging in cardboard	accessories integrated
Multiple packaging in cardboard (25 pcs)	

### Accuracy

Parameter		Unit	
Switching points 1)		% fs	± 0.5
Resolution		% fs	0.1
Thermal characteristic <sup>2)</sup>	max.	% fs/10K	±0.2
Long term stability acc. IEC EN 60770-1	max.	% fs	± 0.25

Test conditions: 25°C, 45% RH, power supply 24 VDC


			1	2	3	4	5	6	7	8	9	10	11
Order code selec	tion table in bar	52	1. X	Х	Х	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
	0 2.5 bar		9	1	4								
	0 4 bar		9	1	5								
	0 6 bar		9	1	7							$\neg$	
	0 10 bar		9	3	0								
	0 16 bar		9	3	1							$\overline{}$	
	0 25 bar		9	3	2							$\overline{}$	
Pressure range 1)	0 40 bar		9	3	3								
	0 60 bar		9	4	0								
	0 100 bar		9	4	1								
	0 160 bar		9	4	2								
	0 250 bar		9	4	3								
	0 400 bar		9	5	4								
	0 600 bar		9	5	5								
	standard			Ť	_	S	0					$\neg$	
Version	for oxygen applications					S	1						
	Contact N/O	High-Side-Switch PNP						1					
Switching contact	Contact N/C	High-Side-Switch PNP						2				$\neg$	
	Swift connector	without cable							0				
Electrical connection	Connector M12x1 2)								3			$\neg$	
	Swift connector with ca	ble 1.5 m							L				
		<sup>7</sup> / <sub>16</sub> -20 UNF sealing cone with Schrader					0			0	0	N	
	Inside thread	7/ <sub>16</sub> -20 UNF								K		1	
		G ¼ with O-Ring seal FPM								1		1	
		½ -14 NPT (≤ 60 bar)								D		1	
		M20x1.5 sealed at front and manometer (combi)								Е		1	
Pressure connection 3)		7/ <sub>16</sub> -20 UNF sealing cone								2		1	
		1/4 -18 NPT								3		1	
	Outside thread	G 1/4 sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM								4		1	
		R ¼ acc. to EN 10226								7		1	
		G ½ sealed at back and manometer with Profile seal ring in FPM								8		1	
		G ½ sealed at front								9		1	
Pressure tip orifice 2)	without (Inclusive press	ure tip orifice from 100 bar on)									0		
	with	· · · · · · · · · · · · · · · · · · ·									2		
Material	Stainless steel 1.4305 /	AISI 303										Ν	
pressure connection	Stainless steel 1.4404 /	AISI 316L										1	
Switching points	Indicate W and state sw	ritching points on order (e.g.: W100/60bar)											W


			1	2	3	4	5	6	7	8	9	10	11
Order code selec	tion table in psi	521	. X	Х	Х	Χ	Χ	Χ	Χ	Χ	Χ	Х	Χ
	0 30 psi		9	В	4								
	0 60 psi		9	В	5								
	0 100 psi		9	В	7								
	0 200 psi		9	С	1								
	0 300 psi		9	С	2								
- **	0 500 psi		9	С	3								
Pressure range 1)	0 750 psi		9	D	0								
	0 1000 psi		9	D	1								
	0 2000 psi		9	D	2								
	0 3000 psi		9	D	3								
	0 5000 psi		9	Е	4								П
	0 7500 psi		9	Е	5								
Wantan.	standard					S	0						
Version	for oxygen applications					S	1						
Switching contact	Contact N/O	High-Side-Switch PNP						1					
	Contact N/C	High-Side-Switch PNP						2					
	Swift connector	without cable							0				
Electrical connection	Connector M12x1 2)								3				
	Swift connector with ca	able 1.5 m							L				
		<sup>7</sup> / <sub>16</sub> -20 UNF sealing cone with Schrader					0			0	0	Ν	
	Inside thread	7/ <sub>16</sub> -20 UNF								K		1	
		G ¼ wiht O-Ring seal FPM								1		1	
		½ -14 NPT (≤ 870 psi)								D		1	
		M20x1.5 sealed at front and manometer (combi)								Е		1	
Pressure connection 3)		<sup>7</sup> / <sub>16</sub> -20 UNF sealing cone								2		1	
		1/4 -18 NPT								3		1	
	Outside thread	G 1/4 sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM								4		1	
		R ¼ acc. to EN 10226								7		1	
		G ½ sealed at back and manometer with Profile seal ring in FPM								8		1	
		G 1/2 sealed at front								9		1	
- ·· · · · · · · · · · · · · · · · · ·	without (Inclusive press	sure tip orifice from 2000 psi on)									0		
Pressure tip orifice 2)	with										2		
Material	Stainless steel 1.4305 /	AISI 303										N	
pressure connection	Stainless steel 1.4404 /	AISI 316L										1	
Switching points	Indicate W and state sw	vitching points on order (e.g.: W1000/400psi)											W

			1	2	3	4	5	6	7	8	9	10	11
Order code selec	Order code selection table in MPa 521.		X	X	Х	Х	Х	Χ	Х	Χ	Х	Х	Χ
	00.25 MPa		9	G	4								
	0 0.4 MPa		9	G	5								
	0 0.6 MPa		9	G	7								
	0 1 MPa		9	Н	0								
	0 1.6 MPa		9	Н	1								
	0 2.5 MPa		9	Н	2								
Pressure range 1)	0 4 MPa		9	Н	3								
	0 6 MPa		9	K	0								
	0 10 MPa		9	К	1								
	0 16 MPa		9	K	2								
	0 25 MPa		9	К	3								
	0 40 MPa		9	L	4								
	0 60 MPa		9	Ī	5								
	standard		Ť		-	S	0						
Version	for oxygen application	ns .				S	1						
	Contact N/O	High-Side-Switch PNP				-		1					
Switching contact	Contact N/C	High-Side-Switch PNP						2					
	Swift connector without								0				
Electrical connection	Connector M12x1 2)								3				
	Swift connector with o	cable 1.5 m							Ĺ				
		7/ <sub>16</sub> -20 UNF sealing cone with Schrader					0			0	0	Ν	
	Inside thread	7/ <sub>16</sub> -20 UNF								K		1	
		G ¼ wiht O-Ring seal FPM								1		1	
		½ -14 NPT (≤ 6 MPa)								D		1	
		M20x1.5 sealed at front and manometer (combi)								Е		1	
Pressure connection 3)		<sup>7</sup> / <sub>16</sub> -20 UNF sealing cone								2		1	
		1/4 -18 NPT								3		1	
	Outside thread	G ¼ sealed at back ISO 1179-2 (DIN 3852-E) with Profile seal ring in FPM								4		1	
		R ¼ acc. to EN 10226								7		1	
		G ½ sealed at back and manometer with Profile seal ring in FPM								8		1	
		G ½ sealed at front								9		1	
	without (Inclusive pre	ssure tip orifice from 10 MPa on)									0		
Pressure tip orifice 2)	with										2		
Material	Stainless steel 1.4305	/ AISI 303										Ν	
pressure connection	Stainless steel 1.4404											1	_
Switching points		switching points on order (e.g.: W10/5MPa)											W
	a.cate wand state s	Antenning points on order (e.g., 1120/orn a)		_									


Accessories (supplied loose)	Order number
Swift connector	117312
Corner-wire box for connector M12x1 with cable 2.0 m	114604
Corner-wire box for connector M12x1	106975
Straight-wire box for connector M12x1	114570
Straight-wire box for connector M12x1 with cable 2.0 m	114605
Mounting bracket with screw	118716
Heat sink with outside thread G $\frac{1}{2}$ sealed at front - inside thread G $\frac{1}{2}$	105631
Heat sink with outside thread G $orall_2$ sealed at front - inside thread G $orall_4$	105073
Heat sink with outside thread G $^{1}\!\!/_{2}$ sealed at front - inside thread G $^{1}\!\!/_{2}$	105074
Calibration certificate (at factory set switching points)	104551

#### Mounting bracket

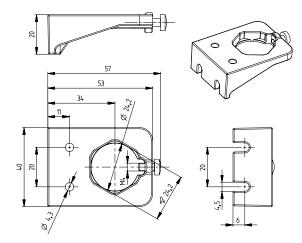


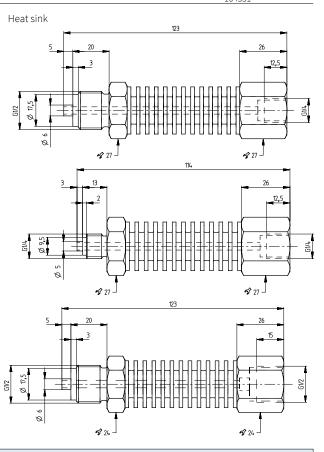

#### Dimensions in mm / Electrical connections

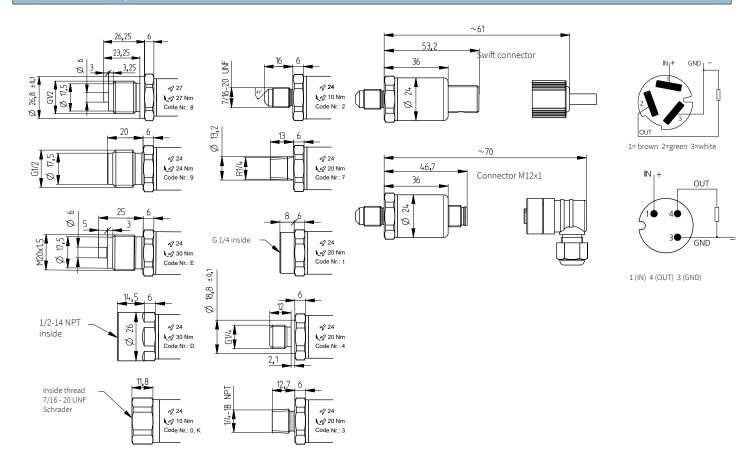


### **Function**



**N/C contact:** When pressure is applied  $(p_0 \to p_{max})$  the switch will disconnect the applied load as soon as the upper switching point is reached. As the pressure falls  $(p_{max} \to p_0)$  the switch will connect the load as soon as the lower switching point is reached.

**N/O contact:** When pressure is applied  $(p_0 \rightarrow p_{max})$  the switch will connect the applied load as soon as the upper switching point is reached. With a fall in pressure  $(p_{max} \rightarrow p_0)$  the switch will disconnect the load as soon as the lower switching point is reached.

Example: p<sub>fs</sub> 20 bar
Upper switching point 12 bar
Lower switching point 8 bar
max. switching load 100 mA



In Proud Partnership with Huba Control



For technical support, sales, & distribution within the USA & Canada

www.paquin.com | (800) 831-8217 | paquinsensors@paquin.com